

**Very small infrared thermometer for temperature measurements on metal from 250 to 1600 °C**

**Features:**

- Temperature range: 250 to 1600 °C
- Small sensing head: : M12x1, 28 mm long, 28 mm, stainless steel housing
- Usable up to 125 °C ambient temperature without cooling (sensing head)
- Green LED alarm indication, aiming support, self diagnostic or temperature code indication
- Scalable analog output: 0 – 5/10 V or 4 – 20 mA (two-wire); additional simultaneous alarm output
- Easy programming via smartphone app (IR mobile) or Windows software (Compact Connect)
- Wide power range: 5–30 V DC



**General specifications**

Environmental rating	IP 65 (NEMA-4)
Ambient temperature	-20 °C ... 125 °C (sensing head) -20 ... 80 °C (electronics) -20 ... 75 °C (electronics / mA version) <sup>1)</sup>
Storage temperature	-40 ... 85 °C (sensing head and electronics)
Relative humidity	10–95 %, non condensing
Vibration	IEC 60068-2-6 / -64
Shock	IEC 60068-2-27 (25 G and 50 G)
Weight	42 g

**Electrical specifications**

Output / analog	0 – 5 or 10 V or 4 – 20 mA
Output / alarm	0 – 30 V / 50 mA (open collector) (mA version: 500 mA)
Output / digital	Uni/ bidirectional, 9.6 kBaud, 0/3 V digital level, USB (option)
LED functions	Alarm indication, automatic aiming support, self diagnostic, temperature indication (via temp. code)
Input (0 – 10 V)	Programmable functional input for external emissivity setting <sup>2)</sup> / ambient temperature adjustment <sup>2)</sup> , triggered signal output or peak-hold function
Cable length head – electronics: after electronics:	0.5 m (standard), 3 m, 6 m 0.5 m (standard), 3 m, 6 m
Current draw	9 mA (mV version)

**Measurement specifications**

Temperature range (scalable via software)	250 ... 800 °C (2ML) 385 ... 1600 °C (2MH)
Spectral range	1.6 µm
Optical resolution (90 % energy)	40:1 (2ML) 75:1 (2MH)
CF lens (optional)	2.7 mm @ 110 mm (2ML) 1.5 mm @ 110 mm (2MH)
System accuracy	±(0.3 % of reading + 1 °C) <sup>3), 4)</sup>
Repeatability	±(0.1 % of reading + 1 °C) <sup>3), 4)</sup>
Temperature coefficient	±0.05 K/K or ±0.05 % / K <sup>5)</sup>
NETD <sup>6)</sup>	40 mK (2ML) 50 mK (2MH)
Response time (90 %)	8 ms (mA version: 20 ms)
Emissivity / Gain (adjustable via software)	0.100 – 1.100
Transmissivity (adjustable via software)	0.100 – 1.100
Signal processing (parameter adjustable via software)	Peak hold, valley hold, average; extended hold function with threshold and hysteresis
Dimensions of electronics	Length: 35 mm Diameter: 12 mm
Software	optris® Compact Connect (Windows) IR mobile (Android)

<sup>1)</sup> mA version: For Vcc (supply voltage) 5 – 12 V DC/ the electronic's max. ambient temperature is 65 °C at Vcc >12 V DC

<sup>2)</sup> mV version only

<sup>3)</sup> At ambient temperature 23 ±5 °C, ε = 1, response time 1 s


<sup>4)</sup> Object temperature >300 °C

<sup>5)</sup> For ambient temperatures <18 °C and >28 °C; whichever is greater


<sup>6)</sup> At time constant of 8 ms and T<sub>Obj</sub> 500 °C (2ML) / 800 °C (2MH)

## Optical parameters


SF optics, D:S = 40:1

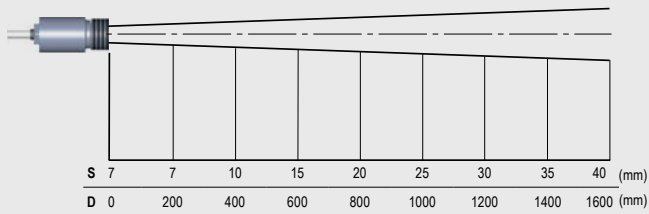


CF optics, D:S = 40:1

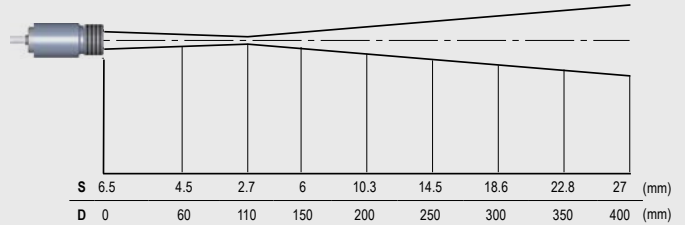

SF optics, D:S = 75:1

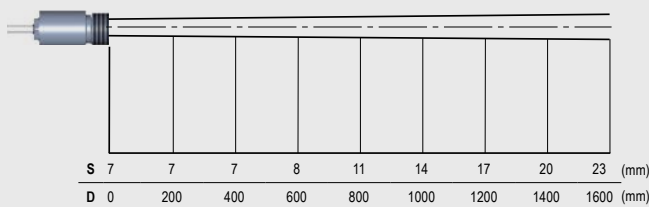


CF optics, D:S = 75:1

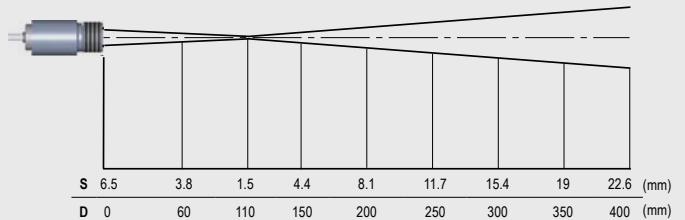


## Connections

Connection mV version

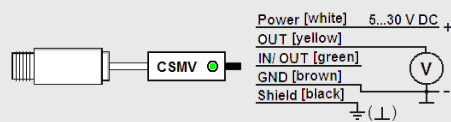


The CSmicro can be connected to a smartphone via the IR app connector

Connection mA version

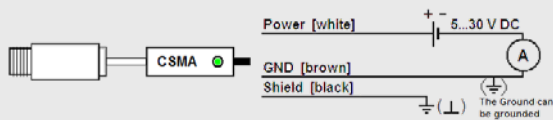


## Dimensions

Dimensions CSmicro

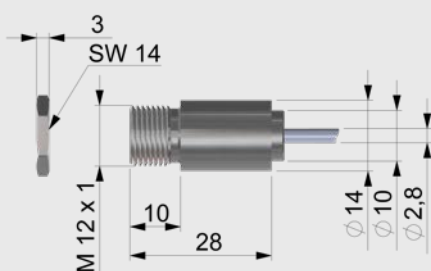

Mounting bracket, fixed (ACCTFB)

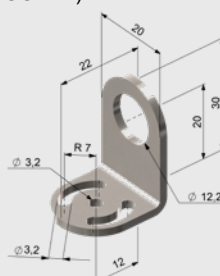

Air purge with integrated CF optics (ACCTAPLCF)

